

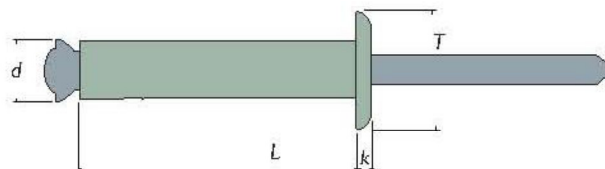

URS A FIORE








Rivetto alluminio/acciaio a fiore

Corpo in alluminio

Chiodo in acciaio zincato

Testa tonda



d		L	L ₁	T	k _{max}										
mm	mm	mm	mm	mm	mm	mm	N	N	pz	kg	pz				
5.0	5.25	60		9.5	1.5	45.0 ÷ 50.0	1800	2100	G	250	1.82	1000			
		70							50.0 ÷ 60.0			G	250	2.03	1000
		80							60.0 ÷ 70.0			G	250	2.16	500
		90							70.0 ÷ 80.0			G	200	2.43	500
		100							80.0 ÷ 90.0			G	200	2.46	500
		120							90.0 ÷ 110			G	200	2.48	500
		140							110 ÷ 130			G	100	2.72	250
		160							130 ÷ 150			G	200	3.20	250
		170							150 ÷ 160			G	200	3.41	250
		180							160 ÷ 170			G	200	3.60	250
		190				170 ÷ 180			G	200	3.68	200			
6.4	6.75	35		12.5	2.0	20.0 ÷ 25.0	2450	3500	G	250	2.24	1000			
		50							32.0 ÷ 40.0			G	250	2.38	1000
		80							60.0 ÷ 70.0			G	200	2.40	500
		100							80.0 ÷ 90.0			G	100	3.52	500
		120							90.0 ÷ 110			G	100	2.18	250
		150							120 ÷ 140			G	100	2.45	250
		175							140 ÷ 160			G	100	2.68	200
		200							150 ÷ 190			G	100	3.08	200

N.B: Per i Ø 5.0 e 6.4 nelle misure superiori a 80 mm il chiodo è grezzo.

su metallo

su vetroresina

su mattone forato



N.B: Il rivetto **A FIORE** si riconosce dalla testa del chiodo in quanto presenta sotto testa quattro tacche che intagliano il corpo del rivetto al momento della posa.